

# IGS-402SW-4PB

4x GbE RJ45 + 2x 100/1000Base-X SFP with 4x IEEE802.3bt PoE++ 240W, 48VDC

**NEW**



- Supports MSTP, RSTP, STP for redundant cabling
- Auto checking and auto reset when PoE PD fail
- 4KV surge protection for PoE, RJ45 and SFP ports



IGS-402SW-4PB is a managed, industrial grade, L2 Gigabit PoE (Power over Ethernet) switch that provides 4x 10/100/1000Base-T ports plus 2x 100/1000Base-X SFP ports with IEEE802.3bt PoE++ Ports. The PoE features enable power and data to be transferred via a single cable, thereby considerably reducing cabling and electrical wiring expenses. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as industrial networks, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. The switch can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) to fulfill the special needs of industrial automation applications.

## Features

- 48VDC (44~57VDC) redundant dual input power
- Provides 4-port IEEE802.3bt PoE++ output, 90W per port, total 240W
- Cable diagnostics, identifies opens/shorts distance
- Supports SmartView™ for Centralized Management\*

\*Please see Chapter 1- **Software Management** for more details

## Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet	<b>PoE standard &amp; RJ-45 Pin Assignment</b>	4x IEEE 802.3af/at/bt PoE++ 4 pairs PoE, 90W/port End-Span, Alternative A and B mode. Positive (V+): RJ-45 pin 1, 2, 4, 5 Negative (V-): RJ-45 pin 3, 6, 7, 8
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet	<b>Network Cable</b>	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair	<b>Protocols</b>	CSMA/CD
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic	<b>Reverse Polarity Protection</b>	Supported for power input
	IEEE 802.3af	PoE (Power over Ethernet)	<b>Overload Current Protection</b>	Supported
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)	<b>CPU Watch Dog</b>	Supported
	IEEE802.3bt	PoE++	<b>Power Supply</b>	Redundant Dual DC 48V (44~57VDC) input power, (Removable terminal block) Below recommended is for different PoE application 54~57VDC VDC for 90W (4 Pairs) PoE application 52~57VDC for 60W (4 Pairs) PoE application 52~57VDC for 30W (2 Pairs) PoE application 44~57VDC for 15.4W (2 Pairs) PoE application
	IEEE 802.1d	STP (Spanning Tree Protocol)	<b>Power Consumption</b>	TBD
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol )	<b>PoE Power Budget</b>	Maximum PoE Output power budget <b>90W / Per Port</b> Total 240W
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)	<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), CPU Act (Green) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : PoE (Green) per port ON : PoE on Off : PoE off
	IEEE 802.1Q	Virtual LANs (VLAN)	<b>Jumbo Frame</b>	10K
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication	<b>IEEE802.3ac</b>	Max frame size extended to 1522Bytes (allow Q-tag in packet)
	IEEE802.3ac	Max frame size extended to 1522Bytes	<b>MAC Address Table</b>	4K
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)	<b>Memory Buffer</b>	220K Bytes for packet buffer
	IEEE 802.3x	Flow control for Full Duplex	<b>Device Memory</b>	128M Bytes Flash ROM, 256M Bytes RAM
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)		
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 12Gbps Full wire-speed			
<b>Data Processing</b>	Store and Forward			
<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode			
<b>Network Connector</b>	4x 10/100/1000Base-T RJ-45 + 2x 100/1000Base-X SFP connector RJ-45 UTP port supports Auto negotiation speed, Auto MDI/MDI-X function, SFP port supports 100/1000 dual speed with DDMI			
<b>Console</b>	USB Type C			
<b>Auxiliary port</b>	USB type A For Firmware upgrade, Configuration file Upload/Download			

<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message
<b>Removable Terminal Block</b>	Provide 2 redundant power, 4 Pin
<b>Operating Temperature</b>	-10 ~ 60°C (IGS-402SW-4PB) -40 ~ 75°C (IGS-402SW-4PBE)
<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless
<b>Dimensions</b>	106 x 38.6 x 152mm (D x W x H)
<b>Weight</b>	TBD
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (Optional)
<b>MTBF</b>	TBD (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE (EN55032, EN55035)
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE

<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A
<b>EMS (Electromagnetic Susceptibility) Protection Level Surge protection</b>	EN61000-4-8 (PFME, Magnetic Field) Field Strength: 300A/m, Criteria A 4KV for PoE, UTP and Fiber ports
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6


## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration ) Voice VLAN
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
<b>Loop Protection</b>	Supported
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE 802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE 802.1p based CoS, IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
<b>Bandwidth Control for Egress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
<b>DiffServ (RF 2474) Remark</b>	Supported
<b>Storm Control</b>	for Unicast, Broadcast, Multicast
<b>IP Multicasting Features</b>	
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS authentication &amp; accounting, TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH , CLI, Console


<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>sFlow</b>	Supported
<b>Modbus/TCP</b>	Supports for management and monitoring
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>FTP client</b>	Supports for upload/download configuration
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB</b>	RFC1213 MIB II, Private MIB
<b>UPnP</b>	Supported
<b>BOOTP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82 , Snooping
<b>RARP</b>	Supported
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported
<b>Event Syslog</b>	Syslog server (RFC3164)
<b>Warning Message</b>	System syslog, e-mail
<b>DNS</b>	Client, Proxy
<b>NTP, SNTP</b>	Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED
<b>IPv6 Features</b>	
<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP, SNTP</b>	Client
<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported
<b>IPv6 ACL</b>	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
<b>Others Features</b>	
<b>Green Ethernet</b>	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity Measuring UTP cable normal or broken point distance
<b>Cable Diagnostic</b>	
<b>Advanced PoE Management</b>	
	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power feeding priority Total PoE Power budget limitation: maximum 240W

## Application

Figure 1 : Application Example

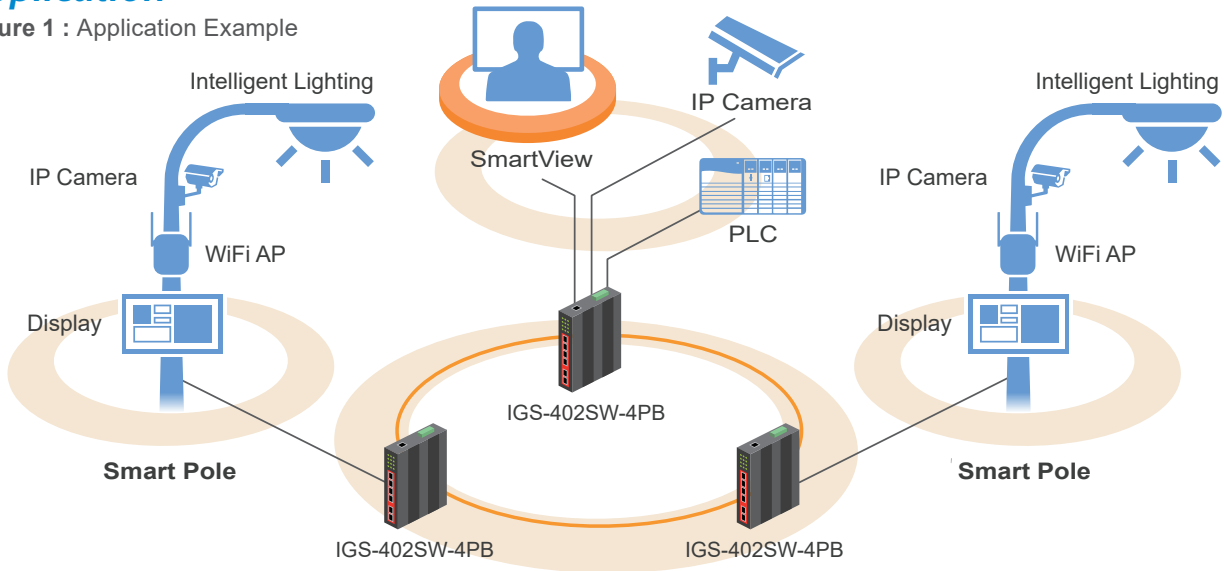

## Dimensions

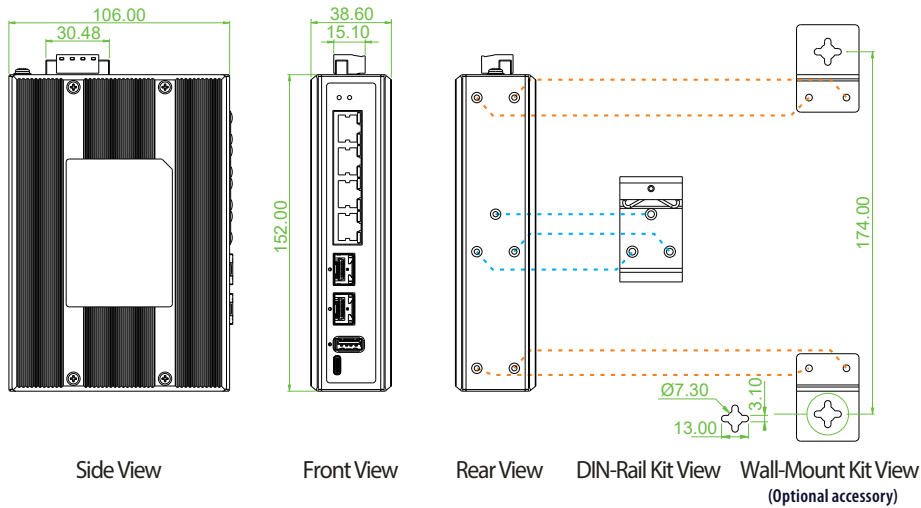

## Ordering Information

Model Name	Total Port	UTP	Fiber	PoE Port		Input Power	Certification	Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	IEEE802.3bt 90W	PowerBudget	Redundant	CE,FCC	
IGS-402SW-4PB	6	4	2 SFP	4	240W	48VDC	V	-10~60°C
IGS-402SW-4PBE	6	4	2 SFP	4	240W	48VDC	V	-40~75°C

### Package List

- IGS-402SW-4PB device
- Terminal block
- Din Rail with screws
- Protective caps for SFP ports

## Optional Accessories

### Wall Mount Kit

**IND-WMK05** Wall Mount kit for Industrial product (2pcs in 1 set, 42 x 30mm)

### Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP data sheets for more items and detailed information.)

**ISFP-M7000-85-D(E)** Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)

**ISFP-S7020-31-D(E)** Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)

**ISFP-T7T00-00-(E)** Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)

**ISFP-M5002-31-D(E)** Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)

**ISFP-S5030-31-D(E)** Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### Industrial Power Supply

**NDR-240-48** Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 240W, -20 ~ +70°C

**NDR-480-48** Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 480W, -20 ~ +70°C (For more ref.)