

# IGS-402SM-4PH24 & IGS-803SM-8PH24

◀ 4x GbE RJ45 + 1x 100/1000 SFP + 1x 100M/1G/2.5G SFP with 4x PoE 120W, 24/48VDC

▶ 8x GbE RJ45 + 1x 100/1000 SFP + 2x 100M/1G/2.5G SFP with 8x PoE 180W, 24/48VDC



- Supports IEEE 1588 PTP V2
- Supports u-Ring, ERPS, EPS, MSTP, RSTP, STP for redundant cabling
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster
- Auto checking and auto reset when PoE PD fail



These Gigabit Ethernet switch models are managed industrial grade L2 switches with 8/4x 10/100/1000M Base-T ports and 3/2x GbE/100M SFP ports which also supports PoE+/PSE and provide stable and reliable transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking. They are an ideal solution for Smart City, surveillance, Intelligent traffic control systems, production automation applications and support up to 8/4 PoE/PoE+ (IEEE 802.3af/IEEE 802.3at) ports which can provide 15.4/30watts power output per port for connecting with heavy-duty industrial PoE devices, such as PTZ IP surveillance cameras, high-performance wireless access points, digital signage and IP phones. (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

## Features

- Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides 4/8 port IEEE 802.3af / 802.3at PoE output (30W per Port)
- Cable diagnostics, identifies opens/shorts distance
- Provides 5 ring instances that each can support u-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device
- μ-Ring for redundant cabling, recovery time<10ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports SmartView™ for Centralized Management\*

\*Please see Chapter 1- **Software Management** for more details

## Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet	<b>Data Processing</b>	Store and Forward
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet	<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair	<b>Network Connector</b>	4x 10/100/1000Base-T RJ-45 + 1x FE/GbE SFP slot+ 1x FE/GbE/2.5G SFP slot (IGS-402SM-4PH24) 8x 10/100/1000Base-T RJ-45 + 1x FE/GbE SFP slot + 2x FE/GbE/2.5G SFP slot (IGS-803SM-8PH24)
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic		RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP ports support 100/1000 or 2.5G with DDMI
	IEEE 802.3cb	2.5GBase-X	<b>PoE standard &amp; RJ-45 pin assignment</b>	4x IEEE 802.3af /IEEE 802.3at PoE+ (IGS-402SM-4PH24) 8x IEEE 802.3af /IEEE 802.3at PoE+ (IGS-803SM-8PH24) End-Span, Alternative A mode. Positive (V+) : RJ-45 pin 1, 2. Negative (V-) : RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)
	IEEE 802.3af	PoE (Power over Ethernet)	<b>Console</b>	RS-232 (RJ-45)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)	<b>Network Cable</b>	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)
	IEEE 802.1d	STP (Spanning Tree Protocol)	<b>Protocols</b>	CSMA/CD
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)	<b>Reverse Polarity Protection</b>	Supported for power input
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)	<b>Overload Current Protection</b>	Supported
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)	<b>CPU Watch Dog</b>	Supported
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)	<b>Power Supply</b>	Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 52VDC for PoE output Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
	IEEE 802.1Q	Virtual LANs (VLAN)		
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication		
	IEEE802.3ac	Max frame size extended to 1522Bytes		
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)		
	IEEE 802.3x	Flow control for Full Duplex		
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)		
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 15Gbps (IGS-402SM-4PH24) 28Gbps (IGS-803SM-8PH24) Full wire-speed			

<b>Power Consumption</b>	IGS-402SM-4PH24				
	<b>Input Voltage</b>	<b>Total Power Consumption</b>	<b>Device Power Consumption</b>	<b>PoE Budget</b>	<b>Boost Efficiency</b>
	24VDC	135.2W	7.5W	120W	94.0%
	48VDC	132.5W	9W	120W	97.2%
	IGS-803SM-8PH24				
	<b>Input Voltage</b>	<b>Total Power Consumption</b>	<b>Device Power Consumption</b>	<b>PoE Budget</b>	<b>Boost Efficiency</b>
	24VDC	200.2W	9.2W	180W	94%
	48VDC	195.1W	9.8W	180W	97%
<b>PoE Power Budget</b>	Maximum PoE Output power budget 30W / Per Port 120W (IGS-402SM-4PH24) 180W (IGS-803SM-8PH24)				
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times /sec (Green) • PoE Output Power Off : Off				
<b>Jumbo Frame</b>	9.6KB				
<b>IEEE802.3ac</b>	Max frame size extended to 1522Bytes (allow Q-tag in packet)				
<b>MAC Address Table</b>	8K				
<b>Memory Buffer</b>	512K Bytes for packet buffer				
<b>Device Memory</b>	16M Bytes Flash ROM, 128M Bytes RAM				
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay				
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC				
<b>Removable Terminal Block</b>	Provides 2 redundant power, alarm relay contact, 6 Pin				

<b>Operating Temperature</b>	-10 ~ 60°C (IGS-402SM-4PH24, IGS-803SM-8PH24) -40 ~ 75°C (IGS-402SM-4PHE24, IGS-803SM-8PHE24)
<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless
<b>Dimensions</b>	106 x 62.5 x 135 mm (D x W x H) (IGS-402SM-4PH24) 106 x 72 x 152 mm (D x W x H) (IGS-803SM-8PH24)
<b>Weight</b>	0.715kg (IGS-402SM-4PH24) 0.96kg (IGS-803SM-8PH24)
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (Optional)
<b>MTBF</b>	674,963 Hours (IGS-402SM-4PH24) 466,542 Hours (IGS-803SM-8PH24) (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A,CE
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Railway Traffic</b>	EN50121-4 (IGS-803SM-8PH24)
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration) Voice VLAN
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE 802.1d STP IEEE 802.1w RSTP IEEE 802.1s MSTP
<b>Multiple μ-Ring</b>	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
<b>Loop Protection</b>	Supported
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)</b>	Supported
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE 802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number

<b>Bandwidth Control for Ingress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
<b>Bandwidth Control for Egress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
<b>DiffServ (RF 2474) Remarking</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast
<b>IP Multicasting Features</b>	
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS authentication &amp; accounting</b>	
<b>TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH, CLI RS-232 console
<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Supports for management and monitoring
<b>sNMP</b>	V1, V2c, V3
<b>sFlow</b>	Supported
<b>ModBus/TCP</b>	Supports management and monitoring
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>FTP client</b>	Supports for upload/download configuration

<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB</b>	RFC1213 MIB II, Private MIB
<b>UPnP</b>	Supported
<b>BOOTP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82, Snooping
<b>RARP</b>	Supported
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported
<b>Event Syslog</b>	Syslog server (RFC3164)
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE1588 PTP V2</b>	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
<b>NTP, SNTP</b>	Server/Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED
<b>IPv6 Features</b>	
<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP, SNTP</b>	Server/Client

<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported
<b>IPv6 ACL</b>	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
<b>Others Features</b>	
<b>Green Ethernet</b>	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity
<b>Cable Diagnostic</b>	Measuring UTP cable normal or broken point distance
<b>Advanced PoE Management</b>	
	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Power feeding priority Total PoE Power budget limitation (maximum 120W for IGS-402SM-4PH24, 180W for IGS-803SM-8PH24)

7

## Application

Figure 1 : Application Example


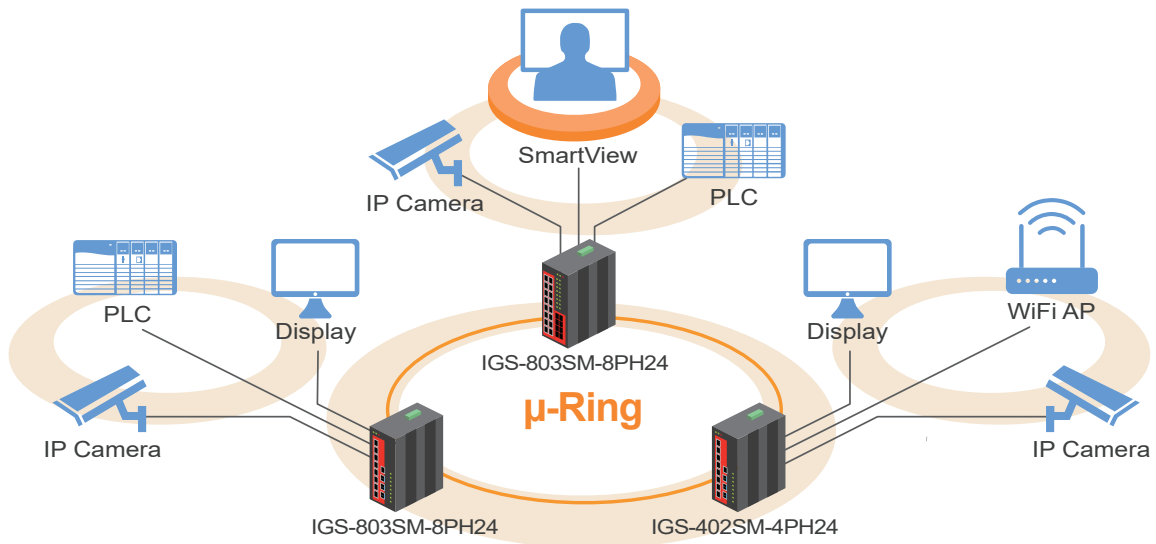



Figure 2 : High Efficiency Boost Technology for PoE

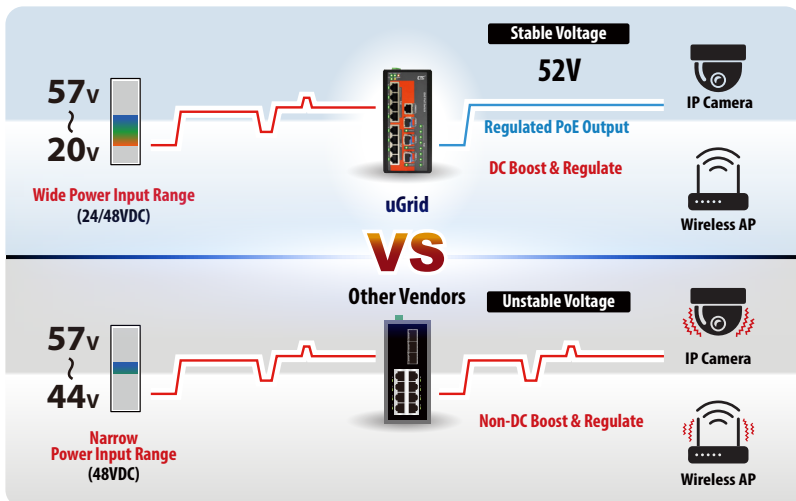


- Regulated PoE output voltage (52VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

## Dimensions

### ► IGS-803SM-8PH24

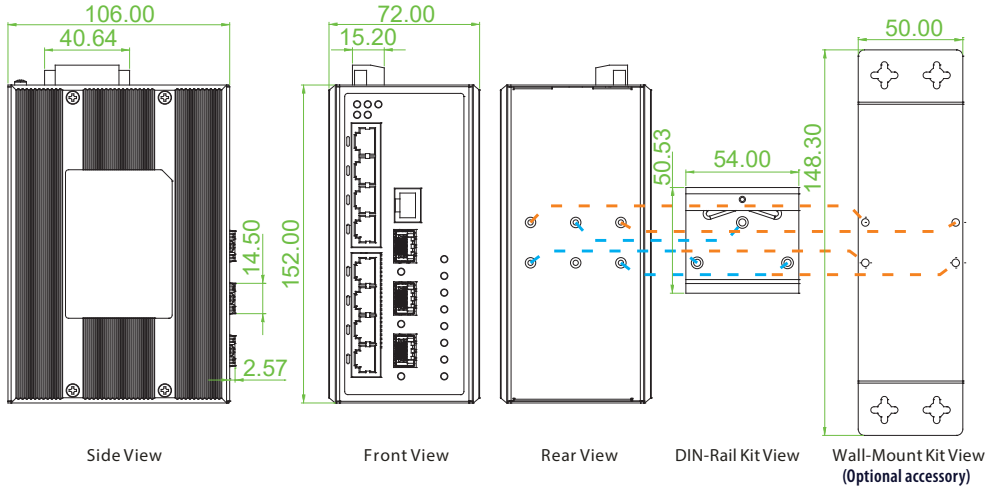

### ► IGS-402SM-4PH24

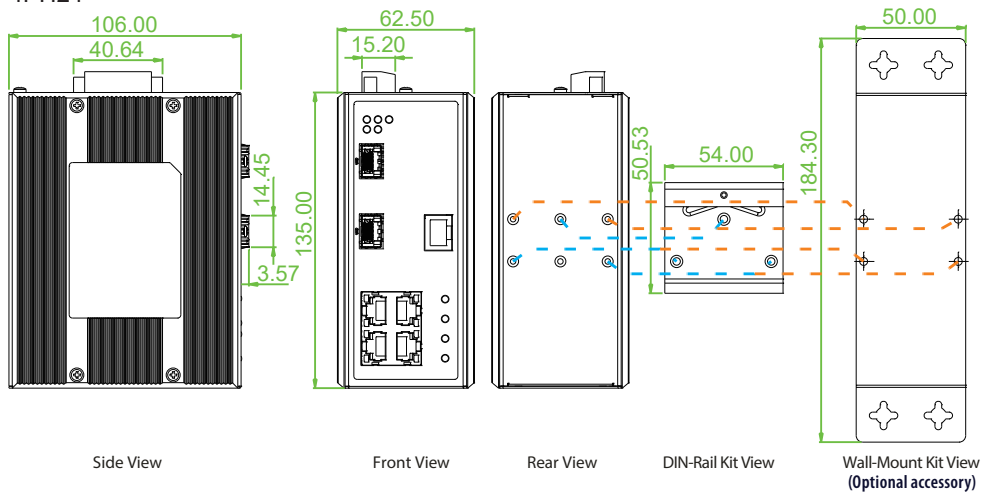

## Ordering Information

Model Name	Total Port	UTP		Fiber		PoE Port		Input Power		Certification		Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	100/1000/2.5G Base-X		IEEE802.3at	Power Budget	Redundant	EN50121-4	CE, FCC		
IGS-803SM-8PH24	11	8	1 SFP	2 SFP	8	180W	24/48VDC	V	V	-10~60°C		
IGS-803SM-8PHE24	11	8	1 SFP	2 SFP	8	180W	24/48VDC	V	V	-40~75°C		
IGS-402SM-4PH24	6	4	1 SFP	1 SFP	4	120W	24/48VDC	V	V	-10~60°C		
IGS-402SM-4PHE24	6	4	1 SFP	1 SFP	4	120W	24/48VDC	V	V	-40~75°C		

### ■ Package List

- IGS-803SM-8PH24 or IGS-402SM-4PH24 device
- Console cable (RJ-45 to DB9)
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

## Optional Accessories

### ■ Wall Mount Kit

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

### ■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP data sheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### ■ Industrial Power Supply

NDR-120-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 120W, -20 ~ +70°C (For IGS-402SM-4PH24)
NDR-240-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 240W, -20 ~ +70°C (For IGS-803SM-8PH24)