

IFS-500

5x 10/100Base RJ45



- EN50121-4, EN61000-6-2, EN61000-6-4, CE, FCC certified
- Provides a DIP-Switch to set functions
- Supports power failure alarm message by relay
- 12/24/48VDC (9.6~60VDC) redundant dual input power
- IP30, rugged metal housing, fanless



Ver.2022 Jan

The IFS-500 is 5 ports 10/100Base-TX Ethernet unmanaged Fast Ethernet switch, that provides stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, the switch is designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- Wide operating temperature -40 ~ 75°C (-E model)
- Provides broadcast storm protection
- Supports DIP SW for alarm setting and broadcast storm protection
- Supports flow control

Specifications


IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX and 100Base-FX Fast Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic
Switch Architecture	Back-plane (Switching Fabric) : 1.0 Gbps
Data Processing	Store and Forward
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Giga Ethernet port
Flow Control	IEEE 802.3x flow control, back pressure flow control
Provides Broadcast Storm Protection	Present, Enable /Disable set by DIP SW
MAC Address Table	2K
Packet Buffer Size	448Kbit
Network Connector	5x RJ-45 RJ-45 Port: Auto MDI/MDI-X function, 10/100Base-TX auto negotiation speed, Full/Half duplex
Network Cable	UTP/STP Cat. 5 cable or above EIA/TIA-568 100-ohm (100meter)
Protocol	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) RJ-45 Per port: Link/Active (Green), Speed 100 (Yellow)
DIP SW	DIP 1 OFF : Enable power failure alarm ON : Disable DIP 2 OFF : Enable broadcast storm protection ON : Disables broadcast storm protection
Reverse Polarity Protection	Present
Overload Current Protection	Present
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)
Power Consumption	2.9W
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, NC

Removable Terminal Block	Provide 2 Redundant power, Alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IFS-500) -40 ~ 75°C (IFS-500-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection and Fanless
Dimensions	106 x 31.6 x 142mm (D x W x H)
Weight	0.42kg
Installation Mounting	DIN Rail mounting or wall mounting
MTBF	650,473Hrs (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	EN62368-1 (Pending)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

7

Industrial Unmanaged FE Switch IFS-500

Dimensions

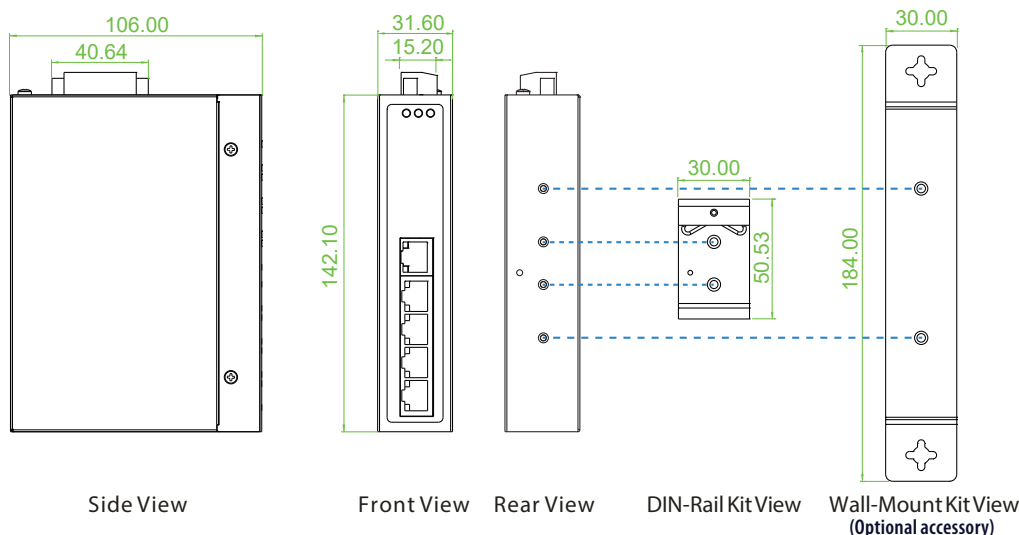

Ordering Information

Model Name	Total Port	Port			Certification					Operating Temperature
		UTP Port	Fiber Port		Railway	Safety	EN61000-6-2	CE	FCC	
		10/100Base-TX	100Base-FX	1000Base-X	EN50121-4	EN62368-1	EN61000-6-4			
IFS-500	5	5	-		V		V	V	V	-10~60 C
IFS-500-E	5	5	-		V		V	V	V	-40~75 C

Package List

- IFS-500 device
- Terminal block
- Din Rail with screws

Optional Accessories

Wall Mount Kit

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm (Narrow)
-----------	--

Industrial Power Supply

MDR-20-24	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ +70°C
MDR-40-48	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 48VDC, 40W, -20 ~ +70°C