

KNS-12

Splice trays

Description:

The splice trays are designed for installation into the OPTOKON system of optical rack mount distribution frames and wall mount optical boxes. The splice trays are equipped with fixed internal fiber bend radius protectors, which allow storage and organization of spare fiber, both primary 250 μm and 900 μm coating. The KNS-SH-D splice holders can be used in the splice cassettes, designed for standard heat shrinkable protection sleeves. The capacity depending on outer diameter of protection sleeves after heating is 6 to 12 splices.

The KNS-12S stackable series allows installation hinges at the sides of the cassette, which are designed for opening the block of cassettes and enabling easy access to the spliced fibers during fiber optic systems operation.

The lid – optional accessories for each cassette type can be used to cover a single or block of cassettes.


KNS-12S

Stackable splice cassette, removable and changeable splice holders

storage capacity: 12, up to 24 fibers
dimensions: 170 x 116 x 8 mm
material:

standard: splice holder KNS-SH-D
(2 pc, heat-shrink)
cable tie (4 pcs)

options: lid KNS-12S-L, hinge, fiber
guide,
splice holder

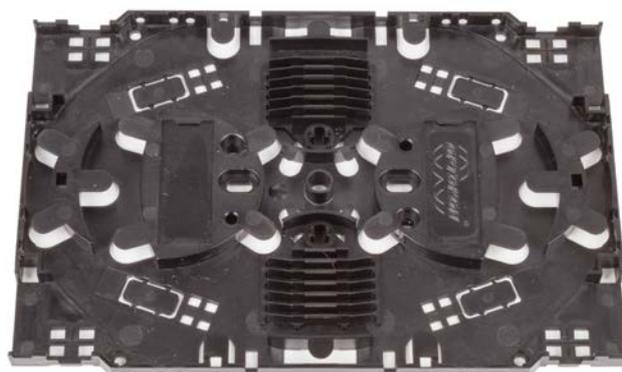


KNS-12M

Mini splice cassette, removable and changeable splice holders

storage capacity: 12 fibers
dimensions: 155 x 91 x 8 mm
material:

standard: splice holder KNS-SH-D
(2 pcs, heat-shrink)
cable tie (4 pcs)

options: lid KNS-12M-L, splice holder

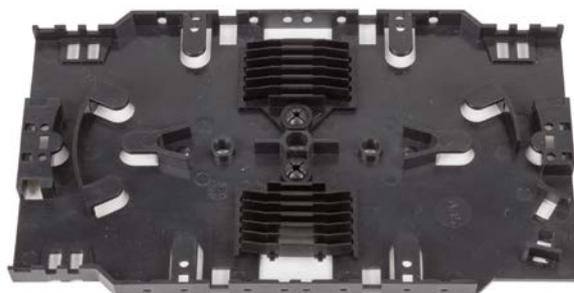

Accessories:

Splice holder



KNS-SH-D
6- 12 fibers capacity¹

Fiber guide




KNS-FG

Hinge



KNS-HI

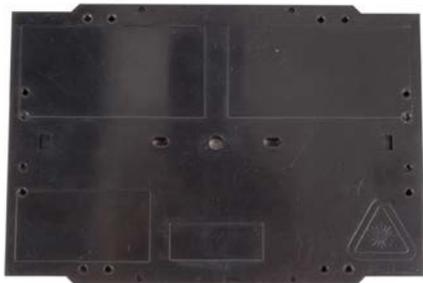

KNS-12S-L lid for KNS-12S splice cassette


KNS-12M-L lid for KNS-M splice cassette

Note: 1) depends on outer diameter of protection sleeve after heating

Accessories application:



KNS-HI application

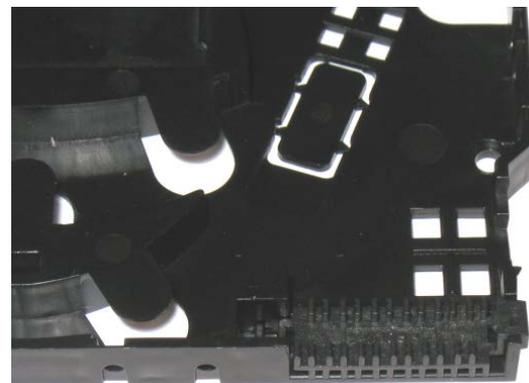

KNS-FG application